



www.StellarScreenway.com

Guangzhou Weijia Photoelectric Tech Group Co Ltd

Shenzhen StellarScreenway Tech Co Ltd

Mobile/WhatsApp/Wechat: +8613825128583

Factory Address: Tangtou First Industrial Zone, Shiyan Street,
Baoan District, Shenzhen, P. R. China

LIGHT UP YOUR EVENTS

Guangzhou Weijia Photoelectric Tech Group Co Ltd

Company profile

Shenzhen StellarScreenway Tech., Co, Limited has been established since 2012. The factory is Located in Shenzhen of China. We have more than 1000sqm workshop, around 30 workers.

StellarScreenway Technology is a fast growing stage lighting manufacturer, which combines the R&D, manufacturing, sales and technical service. The high quality products are guaranteed by the self-developed mechanical design and program, advanced R&D lab, Electronics workshop, Assembling workshop and Q/A department and the cooperation with the high-quality material suppliers.

We have a high efficient sales and service team, which is able to provide you a fast and accurate service before and after the sales.

It's our R&D concept to focus on the developing of characteristic, valuable and innovative products; Customer-oriented and long-term cooperation is our sales and service concept.



公司简介

深圳星熠光电科技有限公司坐落于高速发展的深圳市，是一家专业生产地板灯及LED显示屏设备的创新型厂家。

公司始建于2012年，通过各部门的共同努力下，不断努力开发生产专业舞台设备及显示屏设备，扩大市场份额，当前开发的产品有：LED地板灯，LED标准室内用显示屏，LED室外用显示屏，广告屏等。产品畅销国内外，流行于欧洲，北美洲，南美洲，东南亚和东亚等地。

随着市场的扩大和客户的需求，企业不断吸收新的设计思路，努力做到设计理念和技术创新与市场紧密结合。以人为本，务实创新是福来灯光的经营理念。工厂严格按照国际质量ISO-9001: 2000管理体系要求进行产品的开发，生产过程实时监控，为客户提供可靠的产品质量。

福来专业灯光的服务宗旨：您的满意，我们的追求，为客户创造最大价值！

福来专业灯光现在有：营销部，工程部，技术部，售后服务部，努力为广大客户提供一个温暖的，专业的一条龙服务。

福来专业灯光的经营理念：以人为本，科技立业！您的信任是我们的开始，我们秉承品牌，合作，创新，诚信，锐意进取的经营理念，坚持善待社会，善待客户，善待自然，善待员工的人文理念，振兴民族工业的研究和开发力度，市场导向，创造一种高品质的产品，打造百年长青基业，福来专业灯光努力打造成为国际知名品牌。



1/LED Dance Floor Expert


LED 地砖灯系列

FO-LD64P	01-02
FO-XK36	03-04
FO-LD60FW	05-06
FO-LD60FS	07-08
FO-LD64DS	09-10
FO-LD64DSX	11-12
FO-LD64DI	13-14
FO-LD144D	15-16
FO-LD50FS	17-18
FO-LD50FG	19-20
FO-LD16W	21-22

2/LED Ceiling Light, LED Wall Panel Series

LED 天花墙面系列

FO-BJ-3D	23-24
----------	-------

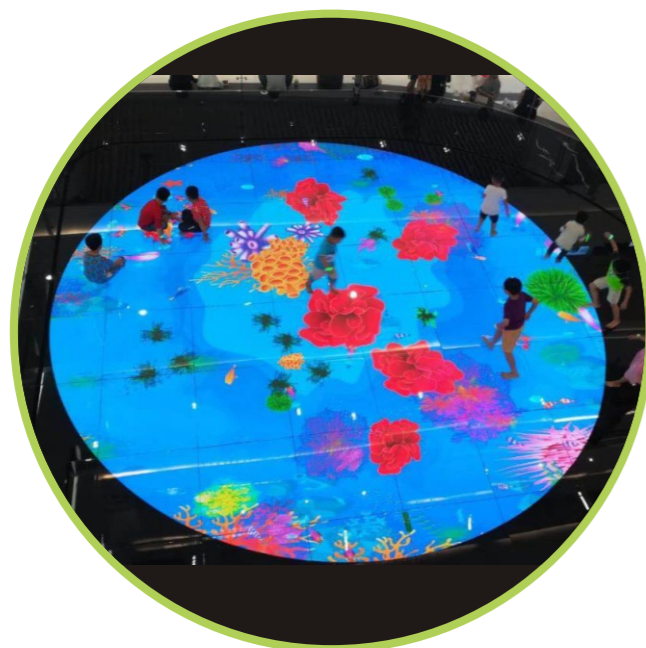

64PCS LED MAGNETIC WIRELESS DANCE FLOOR

64颗无线拼接地砖灯

Model:FO-LD64P



1 second to install 1秒安装
Unique design业内首创

主要参数:

产品型号	FO-LD64P	Product model	FO-LD64P
输入电压	DC24V	Input voltage	DC24V
最大功率	15W	Max power consumption	15W
光源	RGB 3 IN 1	Light source	RGB 3 IN 1
使用寿命	≥50,000小时	Life span	≥50,000h
控制方式	SD控制器(可带DMX,声控,音控,遥控), PC控制器(兼容MADRIX)	Control mode	SD Controller(compatible with DMX, Audio, Sound, Auto control).PC Controller(compatible with MADRIX)
产品规格	L600*W600*H43mm	Dimension(mm)	L600*W600*H43mm & L500*500*70mm
产品净重	10.8KG	N.W.	10.8KG
面板材质	钢化玻璃	Surface material	Tempered Glass
底座材质	高强度ABS	Base material	High strength ABS
承受重量	300KG	Load-bearing	300KG
工作温度	-20°C~+45°C	Ambient temperature	-20°C~+45°C
防护等级	IP55	IP grade	IP55

Main Specification:




1. Multi-functions, can play text, graphics, video, picture and flash
2. Real wireless connection, to achieve one second installation, super easy to maintain.
3. Easy to operate: with remote, audio, sound control, effect editable, adopt with DMX, Maxdrix software.
4. High quality material, scratch-proof, moisture-proof, strong loading bearing

应用领域

婚庆, 酒吧过道, T台, 舞池, 升降舞台, 商场过道, 产品发布会, 大型晚会, 演唱会。

Application

KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, etc.

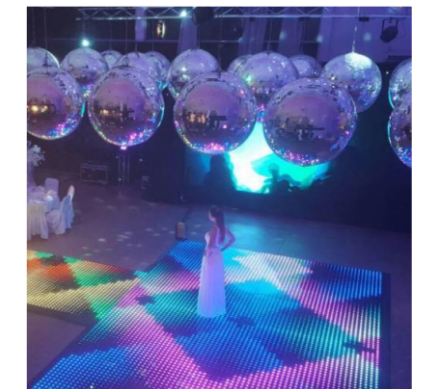

LED MAGNETIC STARLIT DANCE FLOOR

无线星空地砖灯
Model:FO-XK64P




主要参数:

产品型号	FO-XK64P
输入电压	DC24V
最大功率	10W
光源	RGB 3 IN 1
使用寿命	≥50,000小时
控制方式	SD控制器(可带DMX,声控,音控,遥控). PC控制器(兼容MADRIX)
产品规格	L600*W600*H43mm
产品净重	10.8KG
面板材质	钢化玻璃
底座材质	高强度ABS
承受重量	300KG
工作温度	-20°C~ +45°C
防护等级	Ip55
面板颜色	白色或者黑色

Main Specification:




Product model	FO-XK64P
Input voltage	DC24V
Max power consumption	10W
Light source	RGB 3 IN 1
Life span	≥50,000h
Control mode	SD Controller(compatible with DMX, Audio, Sound, Auto control).PC Controller(compatible with MADRIX)
Dimension(mm)	L600*W600*H43mm
N.W.	10.8KG
Surface material	Tempered Glass
Base material	High strength ABS
Load-bearing	300KG
Ambient temperature	-20°C~ +45°C
IP grade	Ip55
Surface color	White & Black optional

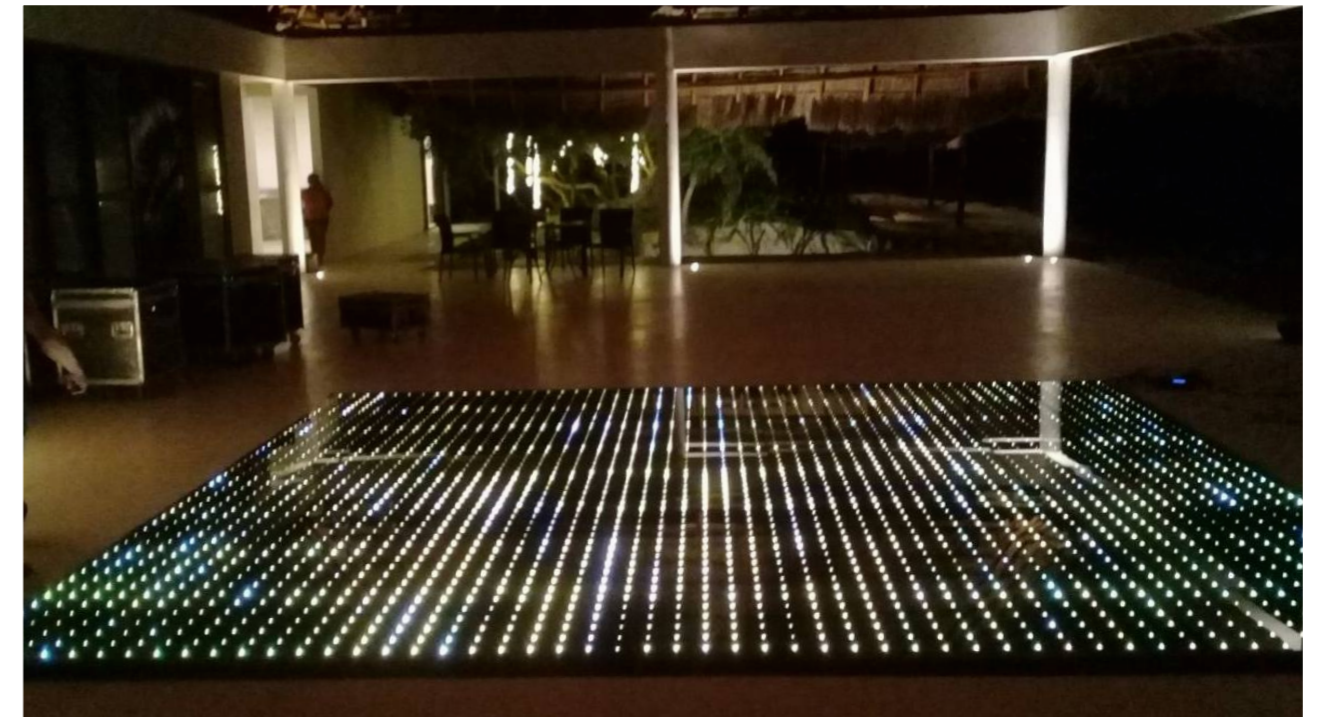

1. Multi-functions, romantic twinkle effect for wedding , text,picture,video,flash, DMX, Madrix etc powerful functions for other events
2. Real wireless connection, to achieve one second installation, super easy to maintain.
3. Achieve From IP22 to IP55 upgrade
4. High quality material and newest manufacturing technique

Application :


Wedding ,other event party ,T stage ,dance stage ,shopping mall ,production conference ,concert,etc.

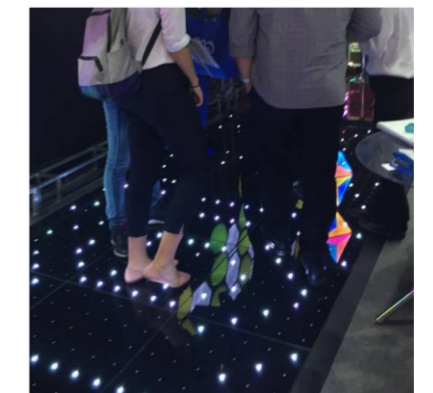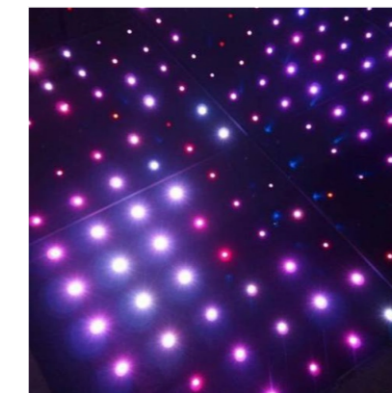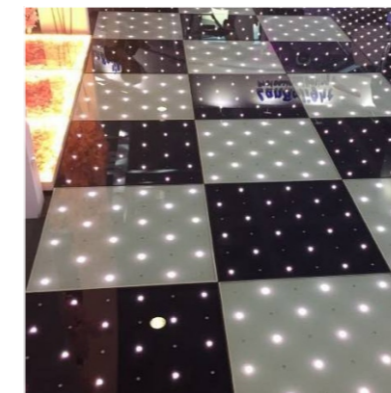

MAGNETIC WIRELESS DMX COLORFUL DANCE FLOOR

整面发光无线地砖灯

Model:FO-LD60FW

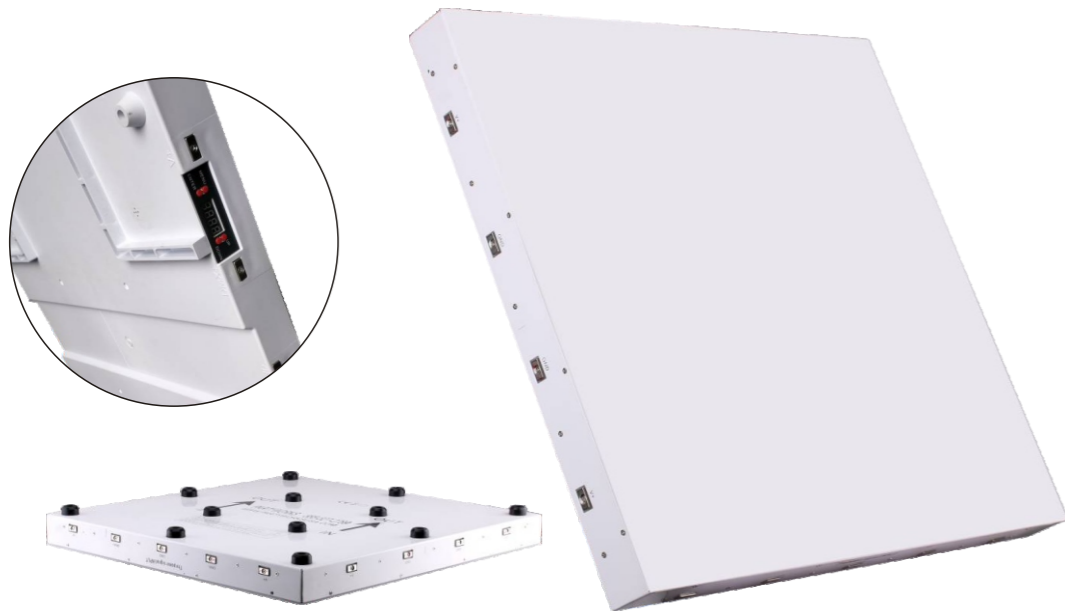


主要参数:

产品型号:	FO-LD60FW
控制方式:	DMX512(声控, 主从, 自走, DMX) SD 控制器(带DMX, 声控, 音控, 遥控)
产品规格:	L600*W600*H70mm
光源:	SMD RGB 3IN1
最大功率:	15W
输入电压:	DC24V
净重:	12KG
亮度:	高亮度
面板材质:	钢化玻璃或PP
底座材质:	ABS
承受重量:	300KG/m2
防水等级:	IP55
光束角:	160°
工作温度:	-20°C~ +45°C
使用寿命:	≥50, 000 h
电源:	外置电源

Main Specification:

Item no.:	FO-LD60FW
Control Mode:	DMX512(sound, master/slave, auto mode, DMX), SD controller(with DMX, sound control, audio control, remote control)
Dimension(mm):	L600*W600*H70mm
Light Source:	SMD RGB 3IN1
Max Power:	15W
Input Voltage:	DC24V
Net Weight:	12KG
Brightness:	high brightness
Surface Material:	tempered glass or PP
Housng Material:	ABS
Bearing Weight:	300KG/m2
Protection Level:	IP55
Beam Angle:	160°
Working Temperature:	-20°C~ +45°C
Life Span:	≥50, 000 h
Power Supply:	built-out



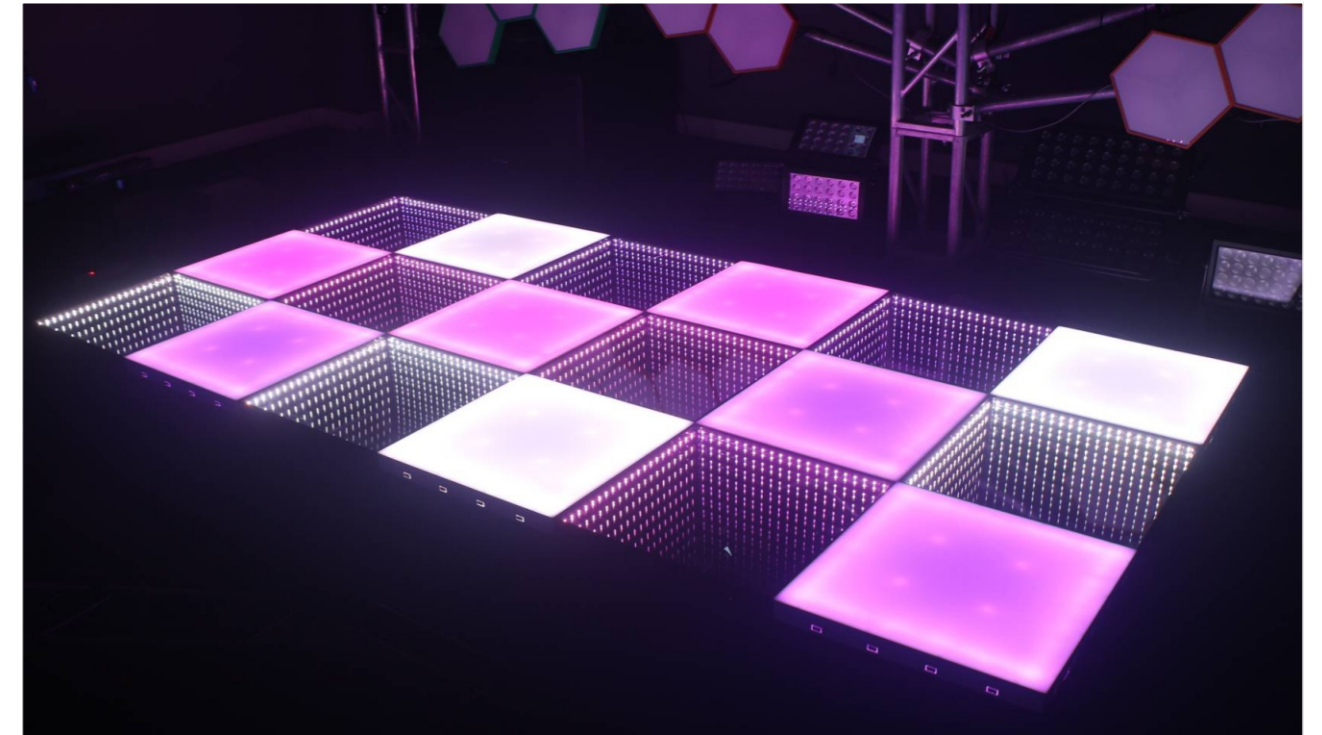


业内首创, 极速安装, 省时省力!
Forelite's Unique Design, fast and simple to install !

应用领域

婚庆, 酒吧过道, T台, 舞池, 升降舞台, 商场过道, 产品发布会, 大型晚会, 演唱会。

KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, etc.

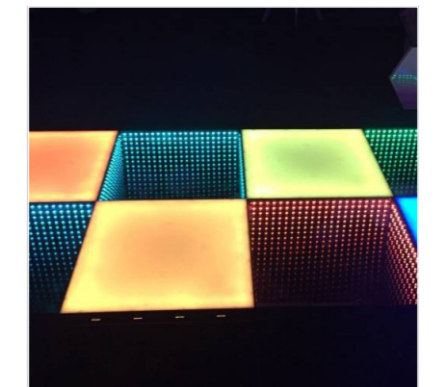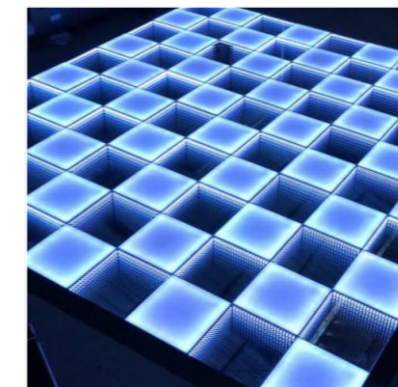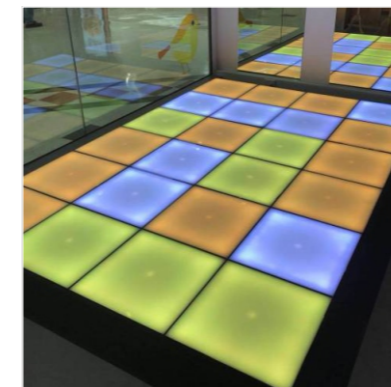

MAGNETIC WIRELESS DMX INFINITE DANCE FLOOR

3D镜面无线地砖灯

Model:FO-LD60FS




主要参数:

产品型号:	FO-LD60FS
控制方式:	DMX512(声控, 主从, 自走, DMX) SD 控制器(带DMX, 声控, 音控, 遥控)
产品规格:	L600*W600*H70mm
光源:	SMD RGB 3IN1
最大功率:	15W
输入电压:	DC24V
净重:	12KG
亮度:	高亮度
面板材质:	钢化玻璃
底座材质:	ABS
承受重量:	300KG/m2
防水等级:	IP55
光束角:	160°
工作温度:	-20°C~ +45°C
使用寿命:	≥50, 000 h
电源:	外置电源

Main Specification:

Item no.:	FO-LD60FS
Control Mode:	DMX512(sound, master/slave, auto mode, DMX), SD controller(with DMX, sound control, audio control, remote control)
Dimension(mm):	L600*W600*H70mm
Light Source:	SMD RGB 3IN1
Max Power:	15W
Input Voltage:	DC24V
Net Weight:	12KG
Brightness:	high brightness
Surface Material:	tempered glass
Housing Material:	ABS
Bearing Weight:	300KG/m2
Protection Level:	Ip55
Beam Angle:	160°
Working Temperature:	-20°C~ +45°C
Life Span:	≥50, 000 h
Power Supply:	built-out

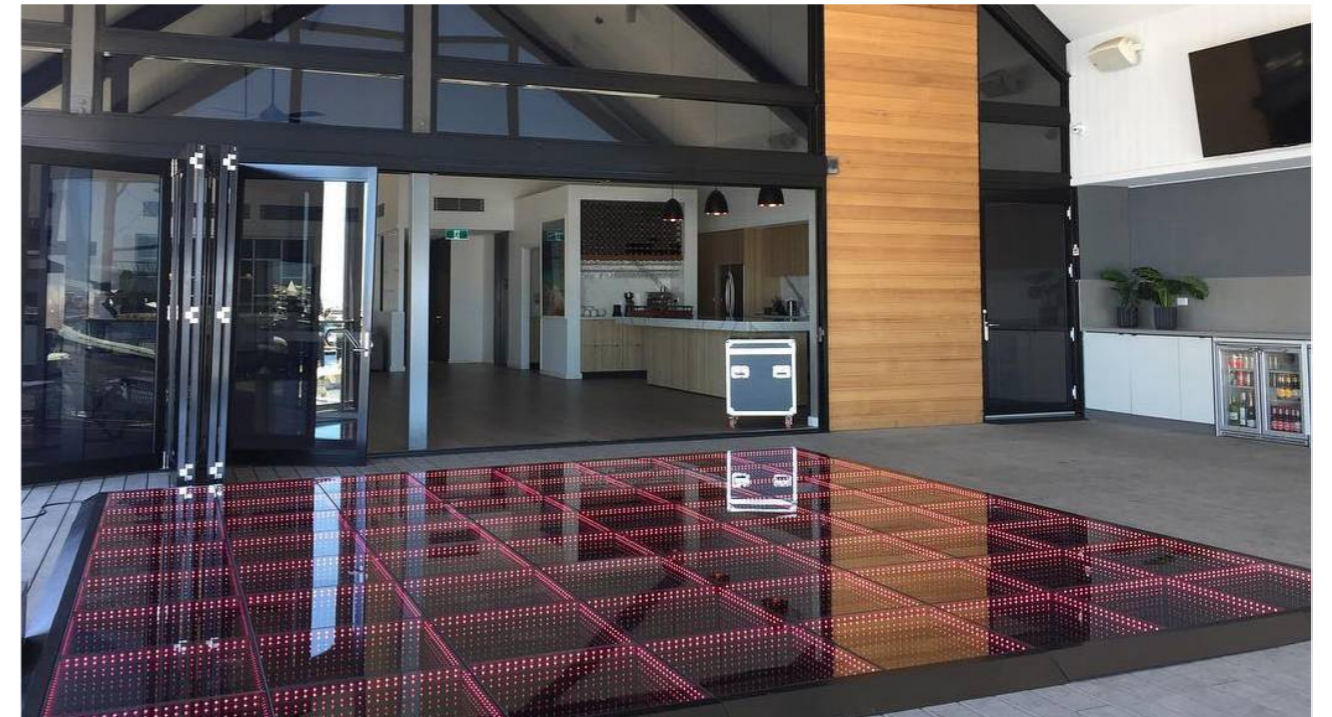




业内首创, 极速安装, 省时省力!

Forelitè's Unique Design, fast and simple to install !

应用领域

婚庆, 酒吧过道, T台, 舞池, 升降舞台, 商场过道, 产品发布会, 大型晚会, 演唱会。


KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, etc.

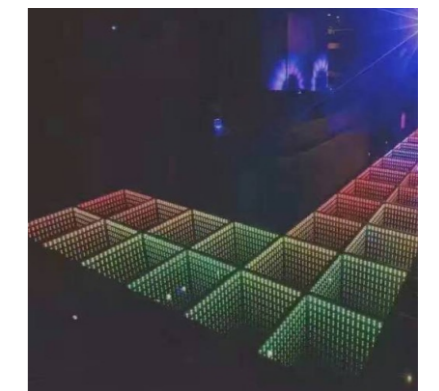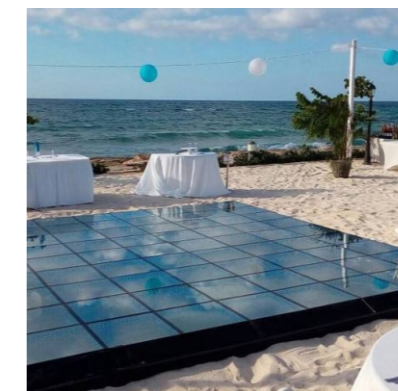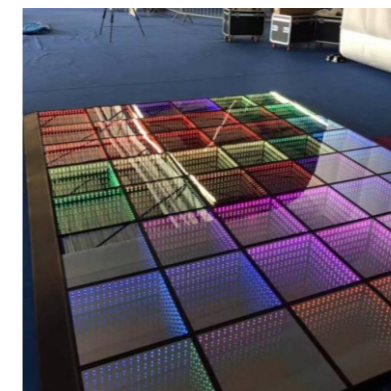

LED DIGITAL DANCE FLOOR

LED数码地砖灯

Model:FO-LD64DS

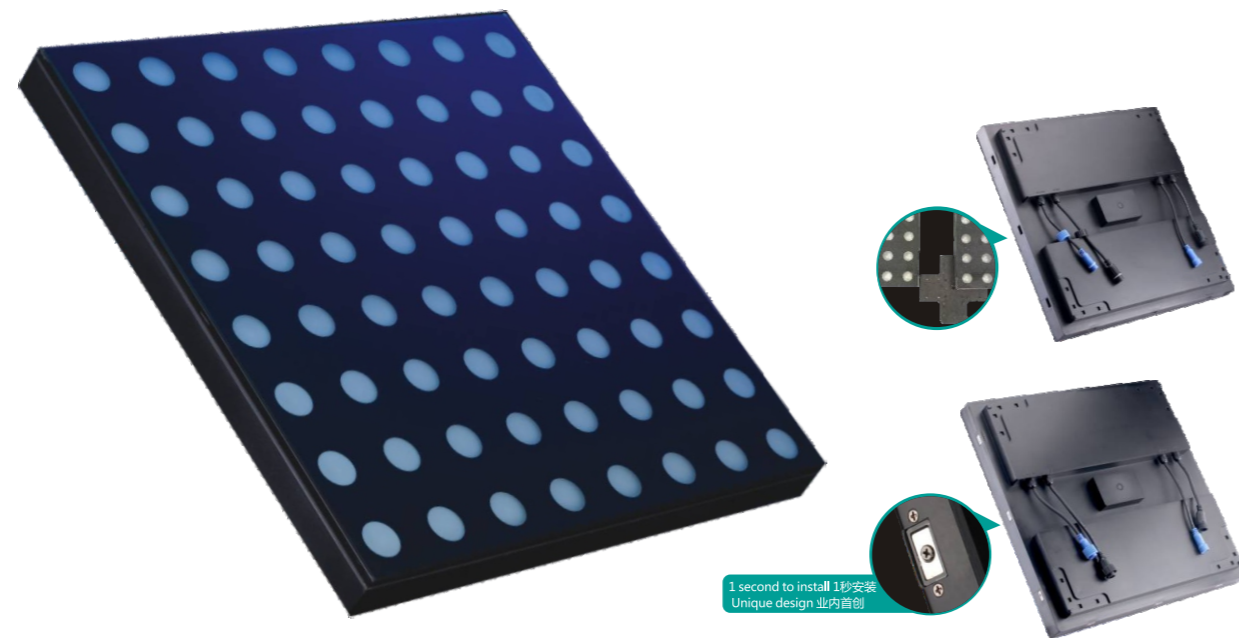

1 second to install 1秒安装
Unique design 业内首创

主要参数:

产品型号	FO-LD64DS
输入电压	AC100-260V 50-60Hz
最大功率	24W
光源	5050RGB 3in1
使用寿命	≥50000小时
控制方式	SD控制器(兼容DMX512), PC控制器
产品规格	L500*W500*H70mm
产品净重	8.8KG
面板材质	钢化黑晶玻璃
底座材质	高强度ABS
承受重量	500KG/m2
工作温度	-20°C~+45°C
防护等级	IP55/IP65
安装方式	2种选择--有线连接片安装, 有线磁铁安装

Main Specification:

Product model	FO-LD64DS
input voltage	AC100-260V 50-60Hz
maximum power	24W
light source	5050RGB 3in1
Service life	≥50000h
control mode	SD controller (compatible with DMX512), PC controller
Product specification	L500*W500*H70mm
Net weight	8.8KG
Panel material	Crystal toughened glass
Base material	high strength ABS
bear weight	500KG/m2
working temperature	-20°C~+45°C
Protection grade	IP55/IP65
Connection Way	2 options--wired with connection strap ,wired with magnetic connection



- 1.Powerful function: can play text, graphics, video, picture and flash,
- 2.Easy to operate: with remote, audio, sound control, effect editable , adopt with DMX , Maxdrix software.
3. Scratch-proof, moisture-proof, strong loading bearing ,easy to maintain.

应用领域

婚庆, 酒吧过道, T台, 舞池, 升降舞台, 商场过道, 产品发布会, 大型晚会, 演唱会。

Application


KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, etc.



LED DIGITAL MAGIC DANCE FLOOR


LED数码魔幻地砖灯

Model:FO-LD64DSX

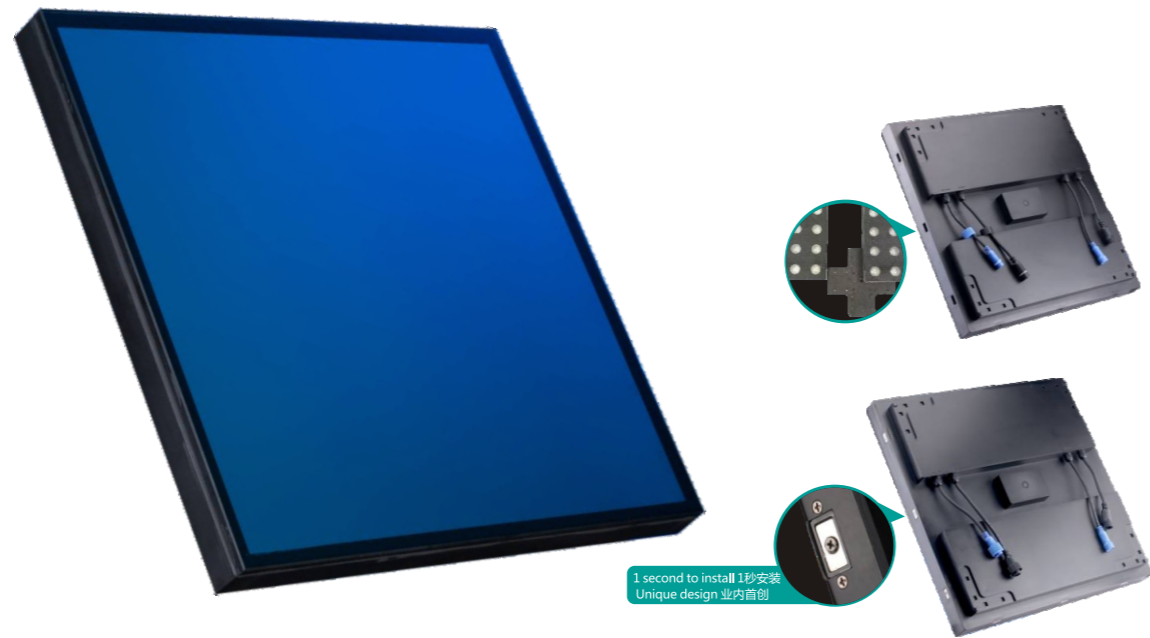

主要参数:

产品型号	FO-LD64DSX	Product model	FO-LD64DSX
输入电压	AC100-260V 50-60Hz	input voltage	AC100-260V 50-60Hz
最大功率	24W	maximum power	24W
光源	5050RGB 3in1	light source	5050RGB 3in1
使用寿命	≥50000小时	Service life	≥50000h
控制方式	SD控制器(兼容DMX512), PC控制器	control mode	SD controller (compatible with DMX512), PC controller
产品规格	L500*W500*H70mm	Product specification	L500*W500*H70mm
产品净重	9.3KG	Net weight	9.3KG
面板材质	钢化黑晶玻璃	Panel material	Crystal tempered glass
底座材质	高强度ABS	Base material	high strength ABS
承受重量	500KG/m2	bear weight	500KG/m2
工作温度	-20℃~+45℃	working temperature	-20℃~+45℃
防护等级	IP55/IP65	Protection grade	IP55/IP65
安装方式	2种选择--有线连接片安装, 有线磁铁安装	Connection Way	2 options--wired with connection strap ,wired with magnetic connection

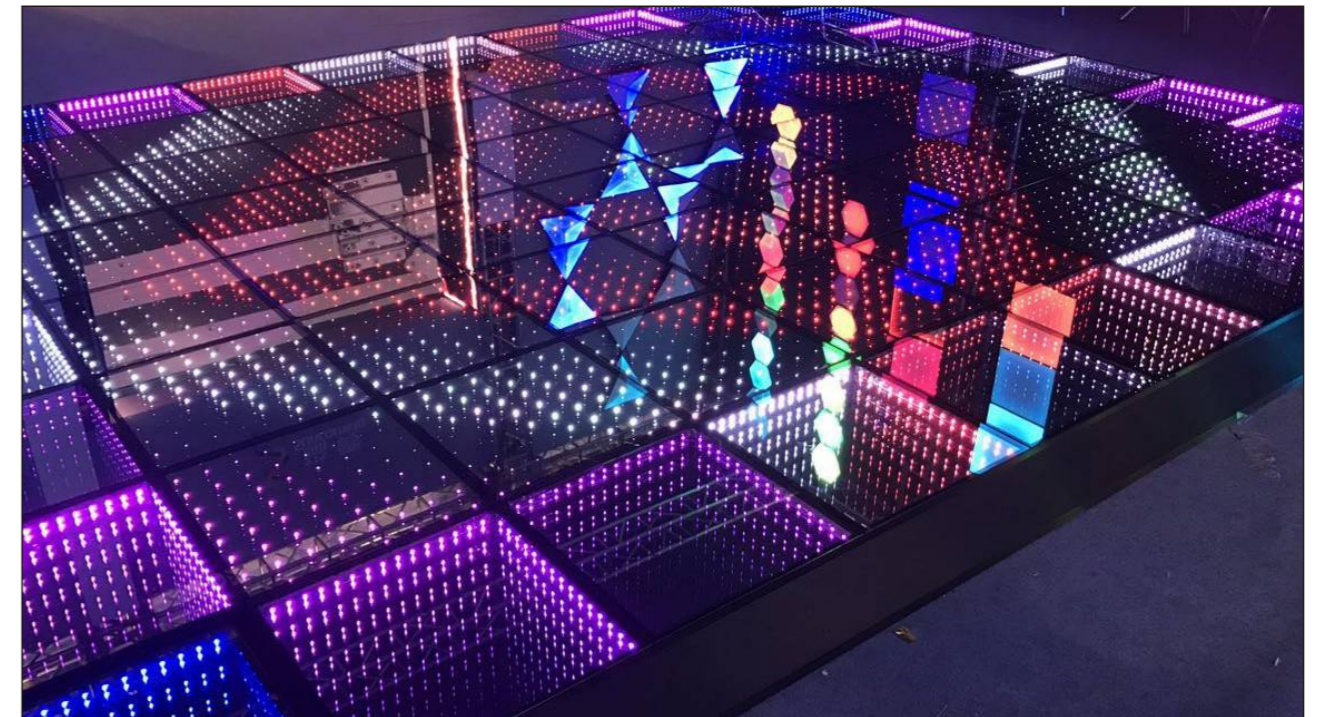



- 1.Luxury feeling for your event, just like diamond covered dance floor.
- 2.Easy to operate: with remote, audio, sound control, effect editable , adopt with DMX , Maxdrix software.
3. Scratch-proof, moisture-proof, strong loading bearing ,easy to maintain.

应用领域

婚庆, T台走秀, 酒吧, KTV大堂, 夜总会, 俱乐部等。

Application


KTV,bar corridor,T stage,dance stage,shopping corridor,production conference,huge party,concert,etc.

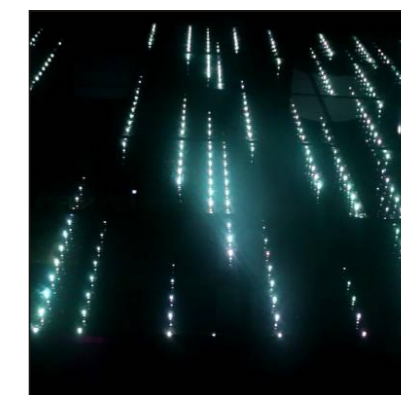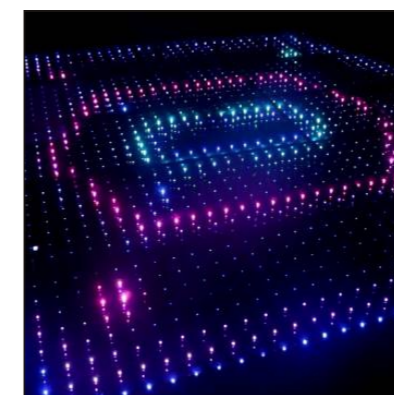

LED INTERACTIVE DANCE FLOOR

LED感应数码地砖灯

Model:FO-LD64DI

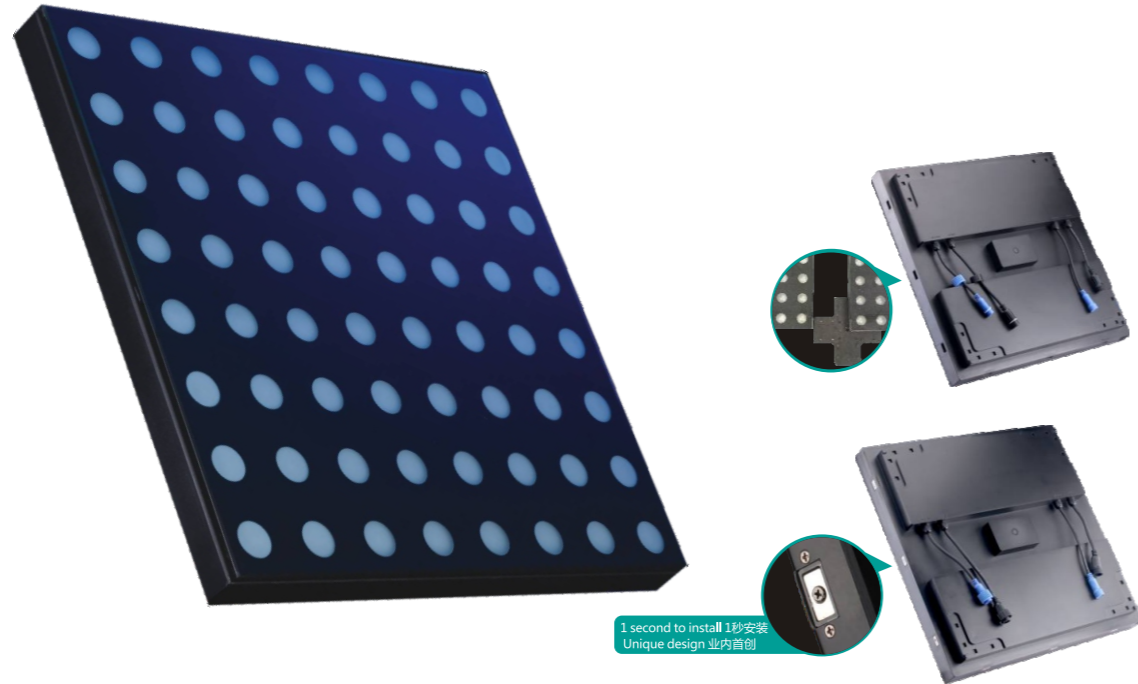

主要参数:

产品型号	FO-LD64DI
输入电压	AC100-260V 50-60Hz
最大功率	12W
光源	5050RGB 3in1
使用寿命	≥50000小时
控制方式	SD控制器(兼容DMX512), PC控制器
产品规格	L500*W500*H70mm
产品净重	8.8KG
面板材质	钢化黑晶玻璃
底座材质	高强度ABS
承受重量	500KG/m2
工作温度	-20℃~+45℃
防护等级	IP55/IP65
安装方式	2种选择--有线连接片安装, 有线磁铁安装

Main Specification:

Product model	FO-LD64DI
input voltage	AC100-260V 50-60Hz
maximum power	12W
light source	5050RGB 3in1
Service life	≥50000h
control mode	SD controller (compatible with DMX512), PC controller
Product specification	L500*W500*H70mm
Net weight	8.8KG
Panel material	Crystal toughened glass
Base material	high strength ABS
bear weight	500KG/m2
working temperature	-20℃~+45℃
Protection grade	IP55/IP65
Connection Way	2 options--wired with connection strap ,wired with magnetic connection





LED感应地板屏, 将舞蹈的节奏感与音乐融为一体, 感应、声控与光电效果联动, 全方位体验互动, 全面激活身体心灵。
LED interactive dance floor bring the rhythm of dance match up with music. Interactive, sound and lighting effect gang together, all-directional interact.

应用领域

婚庆, T台走秀, 酒吧, KTV大堂, 夜总会, 俱乐部等。

Application


KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, etc.

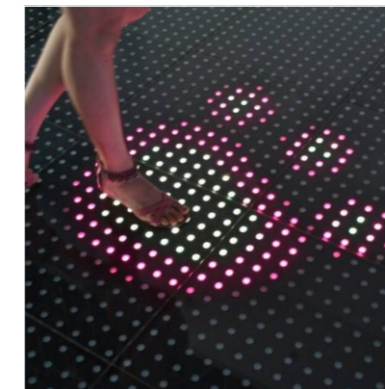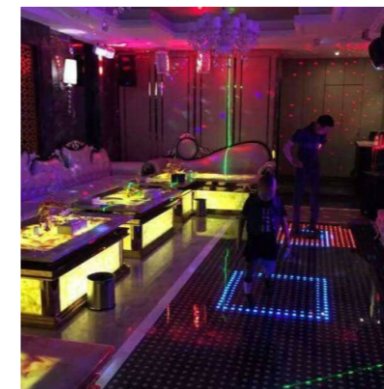

P40 LED HD DIGITAL DANCE FLOOR

P40 LED高清数码地砖灯

Model:FO-LD144D

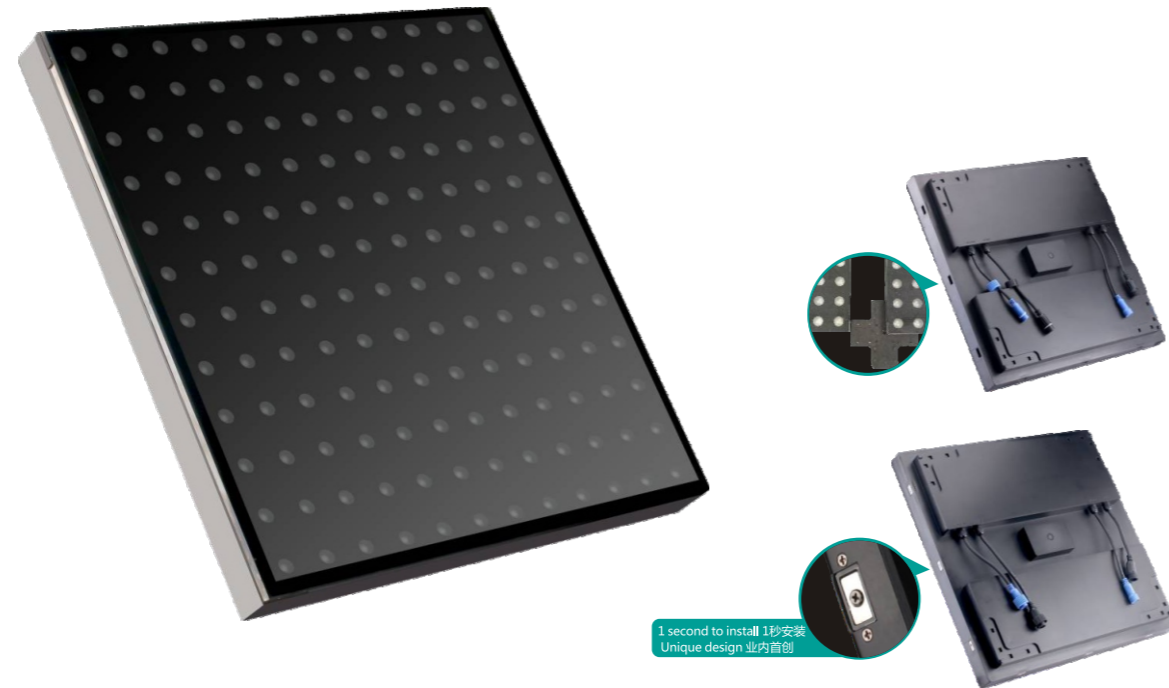

1 second to install 1秒安装
Unique design 业内首创

主要参数:

产品型号	FO-LD144D
输入电压	AC100-260V, 50/60Hz
最大功率	31W
灯珠数量	144颗
光源	RGB 3 IN 1
使用寿命	≥50,000小时
控制方式	SD控制器(可带DMX,声控,音控,遥控). PC控制器(兼容MADRIX)
产品规格	L500*W500*H70mm
产品净重	9KG
面板材质	钢化玻璃
底座材质	ABS
承受重量	500KG/m ²
工作温度	-20°C~ +45°C
防护等级	IP55
安装方式	2种选择--有线连接片安装, 有线 磁铁安装

Main Specification:

Product model	FO-LD144D
Input voltage	AC100-260V, 50/60Hz
Max power	31W
LEDs quantity	144 pcs
Light source	5050 SMD 3in 1
Life span	≥50,000h
Control mode	SD Controller(compatible with DMX,Audio,Sound, Auto control).PC Controller(compatible with MADRIX)
Dimension(mm)	L500*W500*H70mm
N.W.	9KG
Cover material	Tempered glass
Housing material	High strength ABS
Load-bearing	500KG/m ²
Ambient temperature	-20°C~ +45°C
Protection grade	IP55
Connection Way	2 options--wired with connection strap ,wired with magnetic connection





高清像素视频地砖,效果灵活多变;钢化玻璃面板,高端大气,拼接平整,安装快速方便;严格压力测试,可承受500kg/m²;

HD video dance floor, flexible and changable effects, Tempered glass panel, high-end level, smooth splicing, quick and easy installation; Strict stress test, Bear weight 500kg/m²

应用领域

婚庆, 酒吧过道, T台, 舞池, 升降舞台, 商场过道, 产品发布会, 大型晚会, 演唱会。


KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, etc.

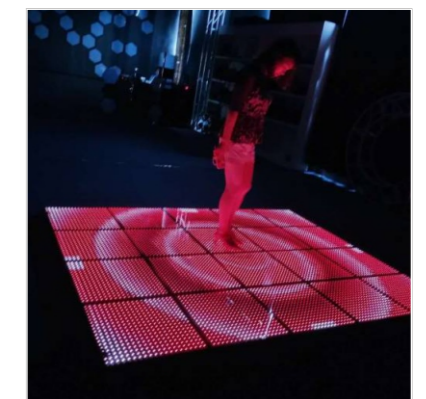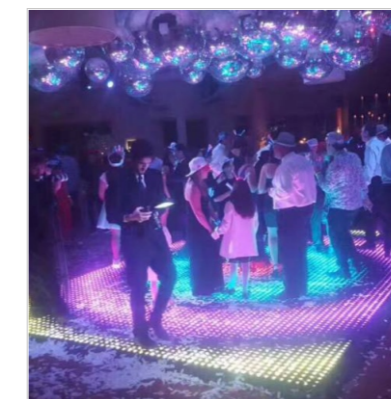

LED 3D MIRROR DANCE FLOOR

LED 3D地砖灯


Model:FO-LD50FS

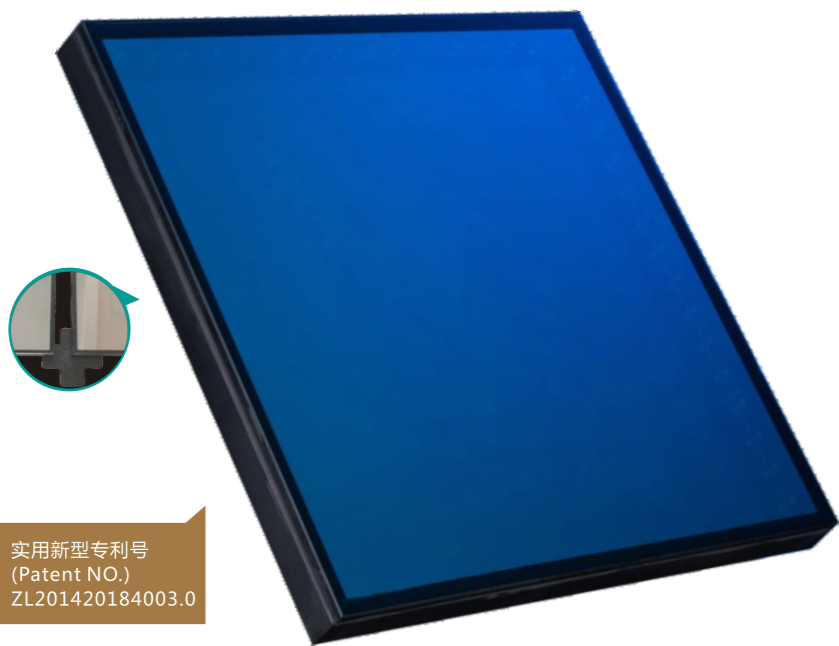

实用新型专利号
(Patent NO.)
ZL201420184003.0

主要参数:

主要参数:		Main Specification:	
产品型号	FO-LD50FS	Product model	FO-LD50FS
输入电压	AC100-260V 50-60Hz	input voltage	AC100-260V 50-60Hz
最大功率	12W	maximum power	12W
光源	5050RGB 3in1	light source	5050RGB 3in1
使用寿命	≥50000小时	Service life	≥50000h
控制方式	SD控制器(兼容DMX512), PC控制器	control mode	SD controller (compatible with DMX512), PC controller
产品规格	L500*W500*H70mm	Product specification	L500*W500*H70mm
产品净重	10KG	Net weight	10KG
面板材质	钢化黑晶玻璃	Panel material	Crystal toughened glass
底座材质	高强度ABS	Base material	high strength ABS
承受重量	500KG/m2	bear weight	500KG/m2
工作温度	-20°C~+45°C	working temperature	-20°C~+45°C
防护等级	IP55/IP65	Protection grade	IP55/IP65

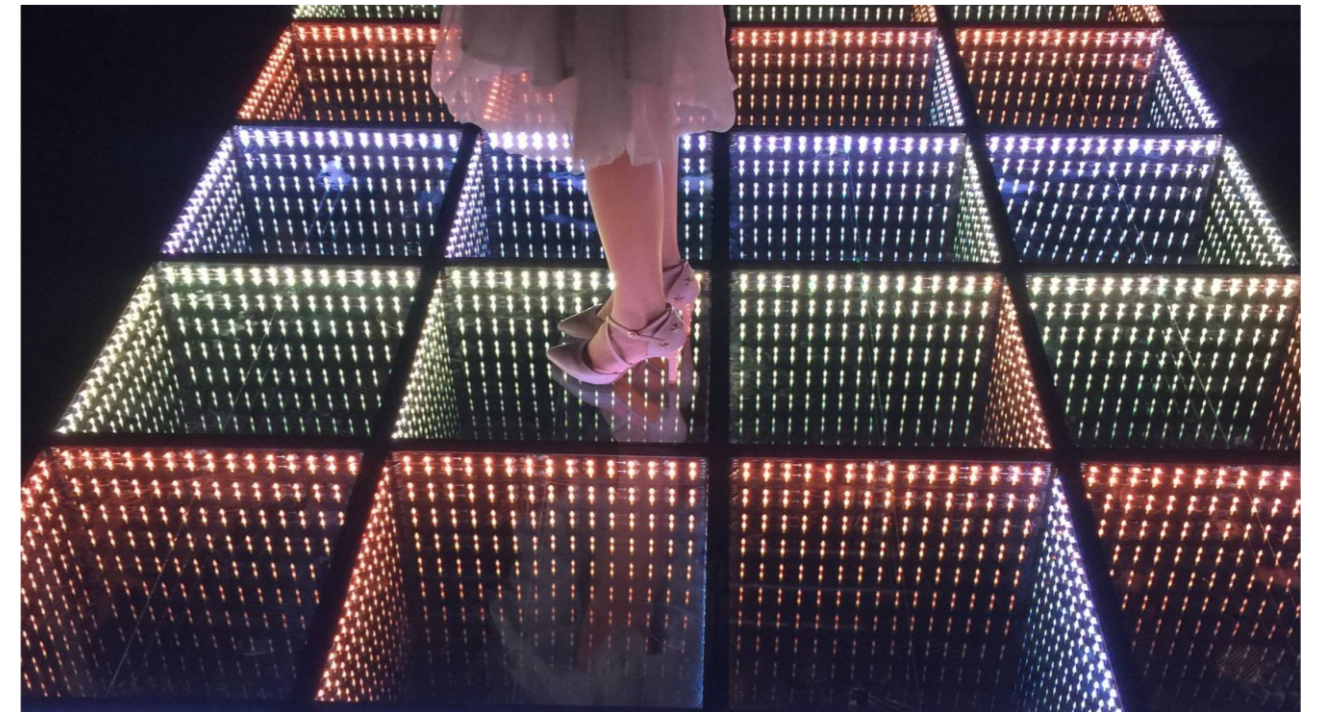



艺术迷惑你的视觉感官,点、线、面折射出空间三维立体之美。LED 3D地板屏,运用两层镜面无限循环反射拓展更多空间,多维度纵深感与炫光效应融入娱乐商业的设计,相得益彰,精彩纷呈。
The best artist can confuse your visual, Point and line to plane can appear the 3D beauty of space. LED 3D infinite dance floor, use the two lays temper glass to appear the infinite and reflect and expand more space, the multiple dimensional and bright light match up with the entertainment design, mutual complementation.

应用领域

KTV包房, 酒吧过道, T台, 舞池, 商场过道, 产品发布会, 大型晚会, 演唱会, 户外广场。

Application


KTV, bar corridor, T stage, dance stage, shopping corridor, production conference, huge party, concert, outdoor plaza, etc.

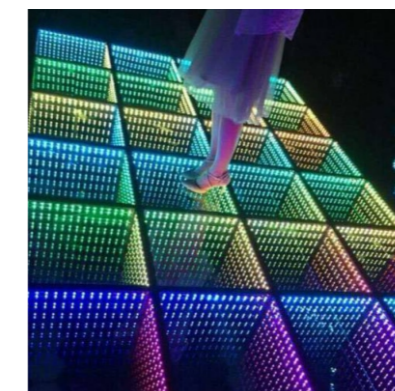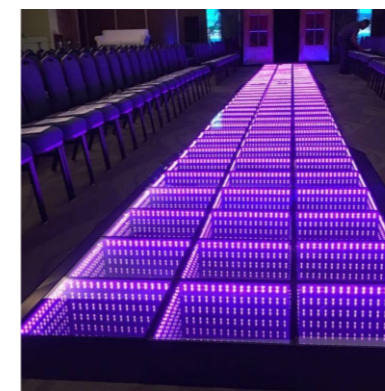

LED INTERACTIVE DANCE FLOOR

LED互动地砖灯

Model:FO-LD50FG

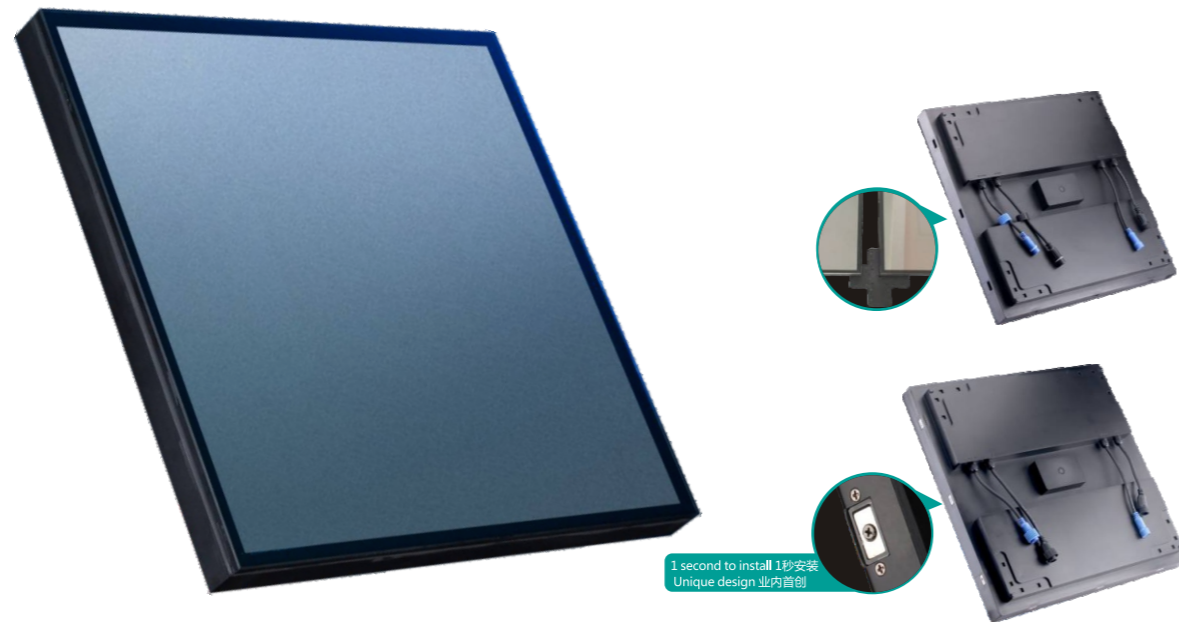


主要参数:

产品型号	FO-LD50FG
输入电压	AC100-260V 50-60Hz
最大功率	12W
光源	5050RGB 3in1
使用寿命	≥50000小时
控制方式	SD控制器(兼容DMX512), 自走, 感应互动
产品规格	L500*W500*H70mm
产品净重	10KG
面板材质	钢化玻璃
底座材质	高强度ABS
承受重量	500KG/m2
工作温度	-20℃~+45℃
防护等级	IP55/IP65
安装方式	2种选择--有线连接片安装, 有线磁铁安装

Main Specification:

Product model	FO-LD50FG
input voltage	AC100-260V 50-60Hz
maximum power	12W
light source	5050RGB 3in1
Service life	≥50000h
control mode	SD controller (compatible with DMX512), Automatic, inductive interaction
Product specification	L500*W500*H70mm
Net weight	10KG
Panel material	Tempered glass
Base material	high strength ABS
bear weight	500KG/m2
working temperature	-20℃~+45℃
Protection grade	IP55/IP65
Connection Way	2 options--wired with connection strap ,wired with magnetic connection

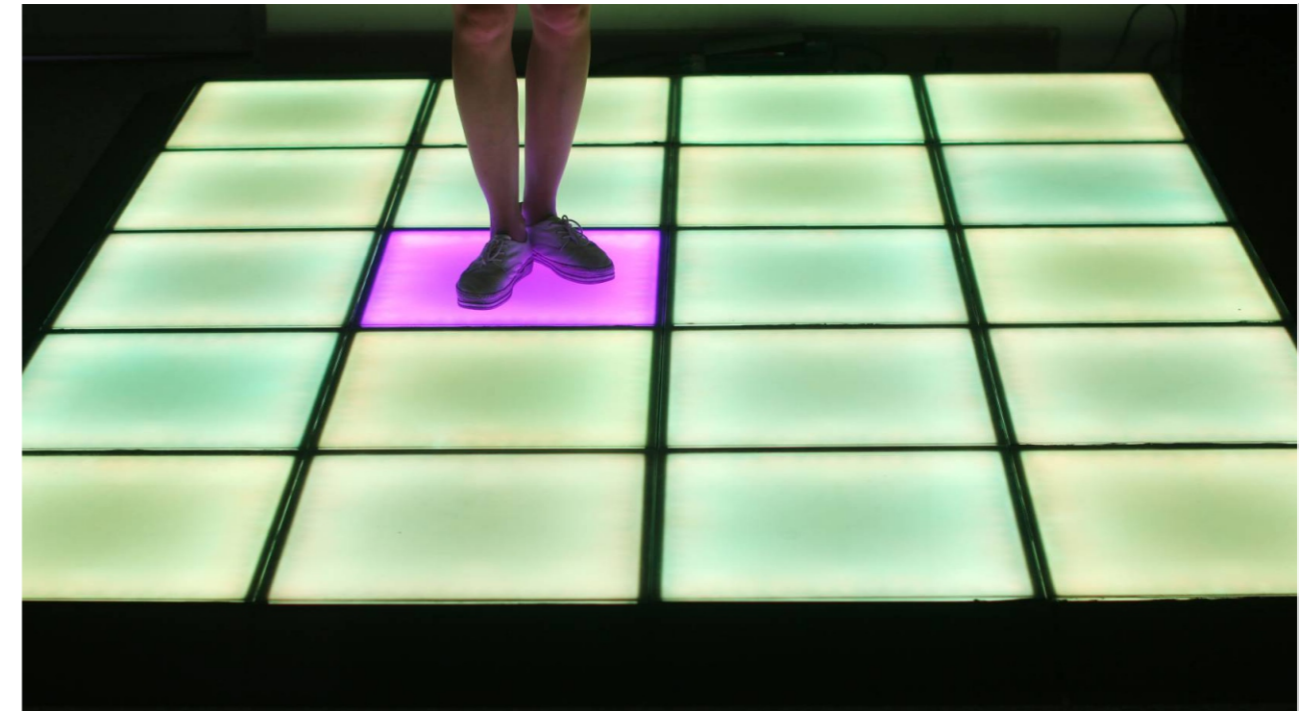


LED互动地板屏, 将舞蹈的节奏感与音乐融为一体, 感应、声控与光电效果联动,全方位体验互动。
LED interactive dance floor bring the rhythm of dance match up with music.
Interactive, sound and lighting effect gang together, all-directional interact.

应用领域

KTV包房, 酒吧过道, T台, 舞池, 升降舞台, 商场过道, 产品发布会, 大型晚会, 演唱会。

Application


KTV,bar corridor,T stage,dance stage,shopping corridor,production conference,huge party,concert,etc.

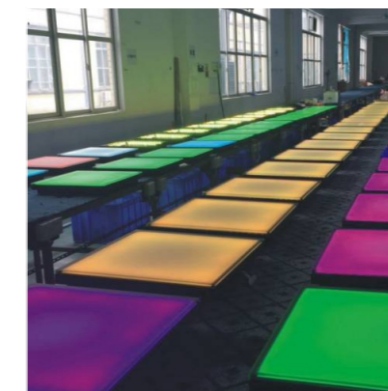

LED STARLITE DANCE FLOOR

LED星空地砖灯

Model:FO-LD16W

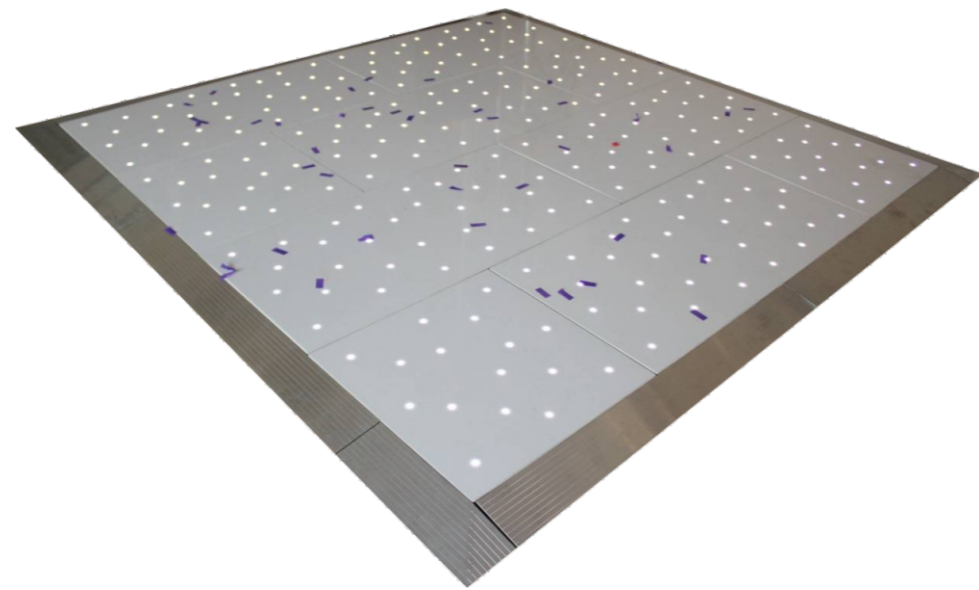

主要参数:

产品型号	FO-LD16W / FO-LD16RGB FO-LD32W / FO-LD32RGB	Product model	FO-LD16W / FO-LD16RGB FO-LD32W / FO-LD32RGB
输入电压	DC36V	input voltage	DC36V
最大功率	4W/8W	maximum power	4W/8W
光源	5050W/RGB 3in1	light source	5050RGB 3in1
使用寿命	≥50000小时	Service life	≥50000h
控制方式	自走, 无线遥控	control mode	Auto, remote control
产品规格	L600*W600*H30mm L600*W1200*H30mm	Product specification	L600*W600*H30mm L600*W1200*H30mm
产品净重	6.5KG/13KG	Net weight	6.5KG/13KG
面板材质	高强度亚克力	Panel material	High strength acrylic
底座材质	铝合金型材	Base material	aluminium alloy
承受重量	500KG/m2	bear weight	500KG/m2
工作温度	-20°C~+45°C	working temperature	-20°C~+45°C
防护等级	IP55	Protection grade	IP55

Main Specification:



简洁, 闪烁, 如同星星璀璨的星星镶嵌在星空一般, 营造浪漫温馨环境。

产品特点:

- 1.平面呈现立体, 效果时尚, 炫丽, 过目不忘;
- 2.灯光效果与整体环境空间设计相融合, 相得益彰;

Product Features:

- 1.Using a panel to bring 3D vision, fashion, gorgeous, unforgettable.
- 2.Lighting effect match up with the whole condition space design, to be mutual complementation.

应用领域

广泛应用高档婚庆场所, 高档西餐厅等领域。

Application



LED 3D HONEYCOMB

LED 裸眼3D 蜂巢灯

Model:FO-BJ-3D



实用新型专利号
(Patent NO.)
201520365894.4
201520366090.6

主要参数:

产品型号	FO-BJ-3D	Product model	FO-BJ-3D
输入电压	AC100-260V 50-60Hz	input voltage	AC100-260V 50-60Hz
最大功率	13W	maximum power	13W
光源	5050RGB 3in1	light source	5050RGB 3in1
使用寿命	≥50000小时	Service life	≥50000h
控制方式	TTL(SD/PC 控制器)	control mode	TTL(SD/PC Controller),DMX
产品规格	L400*W400*H68mm	Product specification	L400*W400*H68mm
产品净重	2.74KG	Net weight	2.74KG
面板材质	亚克力雾化板	Panel material	High strength acrylic
底座材质	铝合金钣金	Base material	aluminium alloy
工作温度	-20°C~+45°C	working temperature	-20°C~+45°C

Main Specification:



LED裸眼3D蜂巢灯, 平面呈现立体, 色彩随心所变, 外观应用具有更强的组合和艺术设计。亮或不亮, 皆属艺术品。广泛应用于酒吧, 夜总会, 清吧, 音乐餐吧等娱乐场所。LED 3D honeycomb, using a panel to bring a amazing 3D vision, color ever-changing, appearance and layout has a stronger combination of art and design. Either light on or off, it is an artwork.

应用领域

夜总会, 酒吧, 音乐餐吧, KTV大堂, 演唱会, 西餐厅的墙面背景及天幕。

Application

Nightclubs, bars, music restaurant bar, KTV rooms, concerts, restaurant walls and ceiling.

